

**LET YOUR WALLS BREATHE.
NOT SUFFOCATE.**

STRETCHMET

EXPANDED STRETCHED METAL

**SUNSCREEN FACADE AND
ARCHITECTURAL MESH**

TO PROTECT AND BEAUTIFY YOUR BUILDING

SITE: Aurum, Mumbai. Mesh used: Amber-10 and Amber-25



AMBER-10



AMBER-25



IT BEAUTIFIES | ALLOWS TO BREATHE | IT PROTECTS

Since 1962

ASM
ASIAN
STRECK
METALS



Quality & Customer Satisfaction

STRETCHMET

From the finest mesh of interior to the robust facade of outdoors has emerged as a go to product for Architects, Industries and Interior Designers

**DUE TO
ALUMINIUM
COMPOSITE
PANELS,
WALLS ARE
GETTING
SUFFOCATED**

Aluminium Composite Panels have played havoc over years with architectural aesthetics and is the reason why buildings are choking to death with no open surface wall to allow breathing, bear the heat, cold and monsoon rains for its stability.

With Aluminium Composite Panel (ACP) covering, your building might look modern, "aesthetic" and boast of superior exterior or interior surface finishing.

But what about the walls behind it? Just to save on painting them, ACPs actually smother the walls... making it vulnerable to pests, fungi, dampness, brittleness etc.

Yes, your building walls are alive as you are

STRETCHMET


Stretched metal, all-weather SUNSCREEN FACADE MESH




Old style
aluminium
composite panels



are now
sheared
open

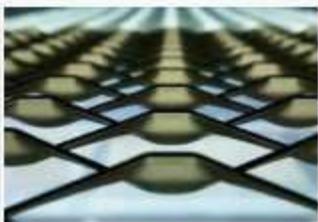

and stretched to form
scientifically
effective air inlets

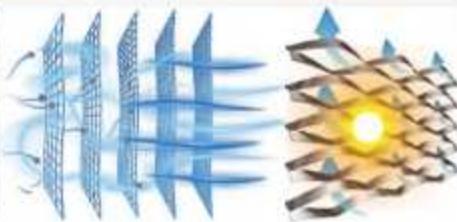


Filtering of cleansed airflow
and diversion of sun rays



DIRECT-FIT
Self-supporting structure
with direct wall fixing




SPACED-FIT
Self-supporting structure with precise
fixing spaced out from the wall



WING-FIT
Independent self-supporting
structure (wing)



**EASY TO FIX
SOLUTIONS**

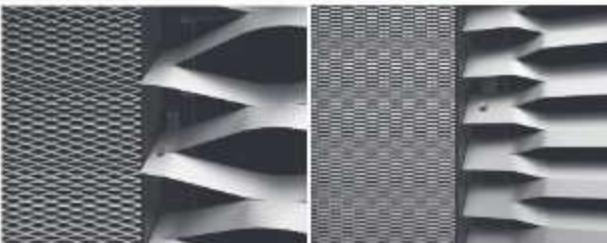


**ECONOMICAL
TO INSTALL**



FEATURES AND BENEFITS

- * Innovative and decorative pattern
- * Aesthetic appeal
- * Prevents glare of sun
- * Reduces solar gain by blocking sun rays
- * Allows passage of air
- * Reduces noise
- * Attractive look
- * Resistance to high wind load

- * Semi transparent
- * Acts as cladding to exterior walls
- * Lightweight and cost effective
- * Easy to handle and install
- * Flexible - could be bent or curved
- * Can be powder coated or painted
- * Versatile
- * Unique design and appearance
- * Style and functionality
- * Variety of openings and sizes

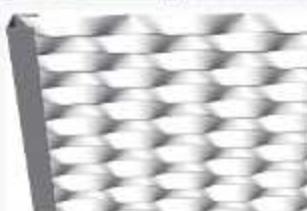


USAGE & ARCHITECTURAL APPLICATIONS

- * Cladding to exterior walls
- * Building façade
- * External and internal ceilings
- * Decorative and acoustic panels
- * Sunscreen over windows
and door frames
- * Signage and advertising



- * Partition walls
- * Staircase railings
- * Guard railings
- * Curtain walls and screens
- * Interior design features
- * Balustrade panels
- * Privacy screens

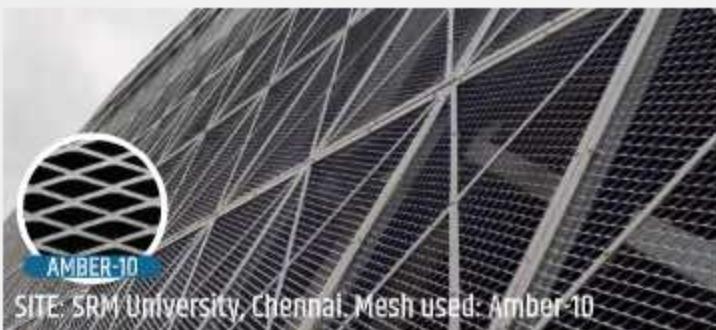

SITE: SRM University, Chennai. Mesh used: Amber-10



SITE: Noida Villa. Mesh used: Ocean-17



SITE: Desker Co-Working, Delhi. Mesh used: Amber-15



SITE: Avinash Times Square, Naya Raipur. Mesh used: Ocean-9



OCEAN-9



SITE: ABB Offices pan India.
Mesh used: Amber-20

STRETCHMET EXPANDED METAL FAÇADE MESH/SUNSCREEN MESH

Specified for many iconic buildings around the world, Expanded Metal Façade Mesh/Sunscreen Mesh has become a critical tool for the Architects and Designers, not only practical but eye-catching and kinder on environment, too.

The structure of Expanded Metal Façade Mesh/Sunscreen Mesh aides the disruption of sound waves, deadening noise and reduction of echo. These practical features of the material in conjunction with its already proven architectural features make it perfect for both decorative ceiling tiles and acoustic panels and are chosen by designers and architects for their beauty and striking appearance.


As global warming continues to stay, so the resultant air-conditioning units put additional pressure and demand of electricity consumption. With a need to stop this, Expanded Metal Façade Mesh/Sunscreen Mesh offers an excellent solution to the problem, by reducing solar gain through blocking the sun's rays as it moves through the day and combat the temperature as the light is allowed through in one direction but not the other. Added to this, it also gives an attractive, decorative and acoustic look as the mesh acts as cladding to the exterior walls but it also serves as a sun screen over the windows and create striking visual effects and appearances.

In terms of sheer visual impact, Expanded Metal cladding systems are hard to beat. Combining the best of modern metallic materials, unique patterns and a range of finishes with practical solar and decorative properties, such system allows architects to ensure any new building stays at the very cutting edge of modern building materials technology.

In terms of refurbishment, dull, grey, concrete surfaces can be cladded to revalue buildings and send them hurtling into the 21st century.


Expanded Metal Façade Mesh/Sunscreen Mesh can be supplied in mild steel, galvanised steel, stainless steel, aluminium, copper, brass sheets as per specific requirements and in wide range of openings and thickness. It can be powder coated and painted in various colours.

From intolerable sun glare

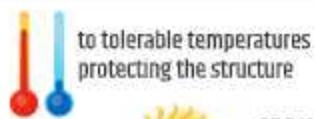

to tolerable temperatures
protecting the structure

The many applications of this innovative shading device enhances the architectural design and are important to today's architects, engineers, builders and the building and construction industries at large.

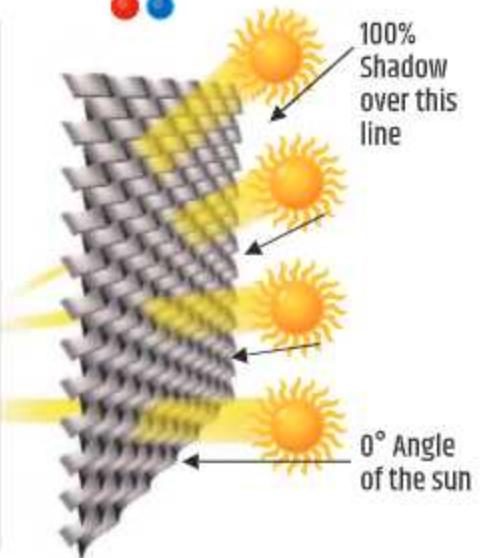

PRODUCT RANGE:

Dimensional Details of Façade Mesh/Sunscreen Mesh

	AMBER WAVE-3	<table border="1"> <thead> <tr> <th>Style</th><th>S/W Inner Opening</th><th>L/W Inner Opening</th><th>Strand Width</th><th>Thickness</th><th>Width in mm</th><th>Length in mm</th><th>Material</th><th>% Open Area</th></tr> </thead> <tbody> <tr> <td>Amber Wave-3</td><td>3mm</td><td>7mm</td><td>3mm</td><td>15/2/3mm</td><td>95mm/122mm/152mm</td><td>2500mm/510mm</td><td>Al/MS/Cu/Br</td><td>65%</td></tr> </tbody> </table>	Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area	Amber Wave-3	3mm	7mm	3mm	15/2/3mm	95mm/122mm/152mm	2500mm/510mm	Al/MS/Cu/Br	65%
Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area												
Amber Wave-3	3mm	7mm	3mm	15/2/3mm	95mm/122mm/152mm	2500mm/510mm	Al/MS/Cu/Br	65%												
	AMBER-10	<table border="1"> <thead> <tr> <th>Style</th><th>S/W Inner Opening</th><th>L/W Inner Opening</th><th>Strand Width</th><th>Thickness</th><th>Width in mm</th><th>Length in mm</th><th>Material</th><th>% Open Area</th></tr> </thead> <tbody> <tr> <td>Amber-10</td><td>35mm</td><td>9mm</td><td>7mm</td><td>15/2/3mm</td><td>95mm/122mm/152mm</td><td>2500mm/510mm</td><td>Al/MS/Cu/Br</td><td>55%</td></tr> </tbody> </table>	Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area	Amber-10	35mm	9mm	7mm	15/2/3mm	95mm/122mm/152mm	2500mm/510mm	Al/MS/Cu/Br	55%
Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area												
Amber-10	35mm	9mm	7mm	15/2/3mm	95mm/122mm/152mm	2500mm/510mm	Al/MS/Cu/Br	55%												
	AMBER-15	<table border="1"> <thead> <tr> <th>Style</th><th>S/W Inner Opening</th><th>L/W Inner Opening</th><th>Strand Width</th><th>Thickness</th><th>Width in mm</th><th>Length in mm</th><th>Material</th><th>% Open Area</th></tr> </thead> <tbody> <tr> <td>Amber-15</td><td>26mm</td><td>90mm</td><td>15mm</td><td>15/2/3mm</td><td>95mm/122mm/152mm</td><td>1500mm/3500mm</td><td>Al/MS/Cu/Br</td><td>35%</td></tr> </tbody> </table>	Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area	Amber-15	26mm	90mm	15mm	15/2/3mm	95mm/122mm/152mm	1500mm/3500mm	Al/MS/Cu/Br	35%
Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area												
Amber-15	26mm	90mm	15mm	15/2/3mm	95mm/122mm/152mm	1500mm/3500mm	Al/MS/Cu/Br	35%												
	AMBER-20	<table border="1"> <thead> <tr> <th>Style</th><th>S/W Inner Opening</th><th>L/W Inner Opening</th><th>Strand Width</th><th>Thickness</th><th>Width in mm</th><th>Length in mm</th><th>Material</th><th>% Open Area</th></tr> </thead> <tbody> <tr> <td>Amber-20</td><td>25mm</td><td>80mm</td><td>24mm</td><td>15/2/3mm</td><td>95mm/122mm/152mm</td><td>1500mm/3000mm</td><td>Al/MS/Cu/Br</td><td>30%</td></tr> </tbody> </table>	Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area	Amber-20	25mm	80mm	24mm	15/2/3mm	95mm/122mm/152mm	1500mm/3000mm	Al/MS/Cu/Br	30%
Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area												
Amber-20	25mm	80mm	24mm	15/2/3mm	95mm/122mm/152mm	1500mm/3000mm	Al/MS/Cu/Br	30%												
	AMBER-25	<table border="1"> <thead> <tr> <th>Style</th><th>S/W Inner Opening</th><th>L/W Inner Opening</th><th>Strand Width</th><th>Thickness</th><th>Width in mm</th><th>Length in mm</th><th>Material</th><th>% Open Area</th></tr> </thead> <tbody> <tr> <td>Amber-25</td><td>25mm</td><td>60mm</td><td>25mm</td><td>15/2/3mm</td><td>95mm/122mm/152mm</td><td>1650mm/2930mm</td><td>Al/MS/Cu/Br</td><td>18%</td></tr> </tbody> </table>	Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area	Amber-25	25mm	60mm	25mm	15/2/3mm	95mm/122mm/152mm	1650mm/2930mm	Al/MS/Cu/Br	18%
Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area												
Amber-25	25mm	60mm	25mm	15/2/3mm	95mm/122mm/152mm	1650mm/2930mm	Al/MS/Cu/Br	18%												
	AMBER STAG	<table border="1"> <thead> <tr> <th>Style</th><th>S/W Inner Opening</th><th>L/W Inner Opening</th><th>Strand Width</th><th>Thickness</th><th>Width in mm</th><th>Length in mm</th><th>Material</th><th>% Open Area</th></tr> </thead> <tbody> <tr> <td>Amber Stag</td><td>18mm</td><td>80mm</td><td>3mm</td><td>15/2/3mm</td><td>95mm/122mm/152mm</td><td>2800mm/5200mm</td><td>Al/MS/Cu/Br</td><td>70%</td></tr> </tbody> </table>	Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area	Amber Stag	18mm	80mm	3mm	15/2/3mm	95mm/122mm/152mm	2800mm/5200mm	Al/MS/Cu/Br	70%
Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area												
Amber Stag	18mm	80mm	3mm	15/2/3mm	95mm/122mm/152mm	2800mm/5200mm	Al/MS/Cu/Br	70%												
	AQUA BIRD	<table border="1"> <thead> <tr> <th>Style</th><th>S/W Inner Opening</th><th>L/W Inner Opening</th><th>Strand Width</th><th>Thickness</th><th>Width in mm</th><th>Length in mm</th><th>Material</th><th>% Open Area</th></tr> </thead> <tbody> <tr> <td>Aqua Bird</td><td>7mm</td><td>50mm</td><td>3mm</td><td>15/2/3mm</td><td>95mm/122mm/152mm</td><td>3000mm/6000mm</td><td>Al/MS/Cu/Br</td><td>60%</td></tr> </tbody> </table>	Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area	Aqua Bird	7mm	50mm	3mm	15/2/3mm	95mm/122mm/152mm	3000mm/6000mm	Al/MS/Cu/Br	60%
Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area												
Aqua Bird	7mm	50mm	3mm	15/2/3mm	95mm/122mm/152mm	3000mm/6000mm	Al/MS/Cu/Br	60%												
	AQUA F	<table border="1"> <thead> <tr> <th>Style</th><th>S/W Inner Opening</th><th>L/W Inner Opening</th><th>Strand Width</th><th>Thickness</th><th>Width in mm</th><th>Length in mm</th><th>Material</th><th>% Open Area</th></tr> </thead> <tbody> <tr> <td>Aqua F</td><td>7mm</td><td>60mm</td><td>1mm</td><td>15/2/3mm</td><td>95mm/122mm/152mm</td><td>1650mm/3000mm</td><td>Al/MS/Cu/Br</td><td>18%</td></tr> </tbody> </table>	Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area	Aqua F	7mm	60mm	1mm	15/2/3mm	95mm/122mm/152mm	1650mm/3000mm	Al/MS/Cu/Br	18%
Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area												
Aqua F	7mm	60mm	1mm	15/2/3mm	95mm/122mm/152mm	1650mm/3000mm	Al/MS/Cu/Br	18%												

MATERIALS: ALUMINUM, MILD STEEL, COPPER, BRASS, STAINLESS STEEL, ETC.
 Strand may vary by 20-25mm, thicknesses may vary by 10-20mm.
 Length of 440mm SWM expanded mesh will vary by 35mm, LWM may vary by 10mm &
 Expanded Metal Expanded mesh will have different dimensions in width of 2-10mm.


PRODUCT RANGE:

Dimensional Details of Façade Mesh/Sunscreen Mesh



AQUA-F4-ING

Style	SWS inner Opening	LWS inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Aqua-10-15	8mm	25mm	4mm	15/24 mm	95mm/122mm/152mm	1800mm/3000mm	Al/Ni/Cu/Br	30%

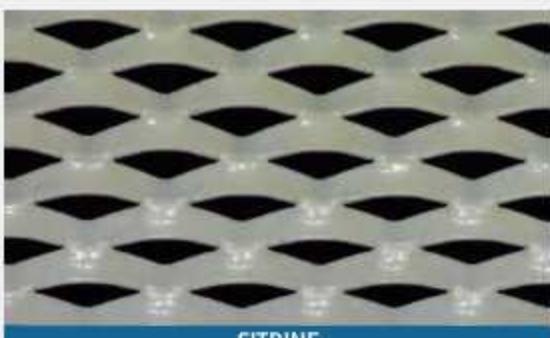


CITRINE

Style	SWS inner Opening	LWS inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Citrine	8mm	25mm	4mm	15/24 mm	95mm/122mm/152mm	1800mm/3000mm	Al/Ni/Cu/Br	30%




EMERALD-10

Style	SWS inner Opening	LWS inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Emerald-10	20mm	8mm	11mm	15/24 mm	95mm/122mm/152mm	1800mm/3000mm	Al/Ni/Cu/Br	40%

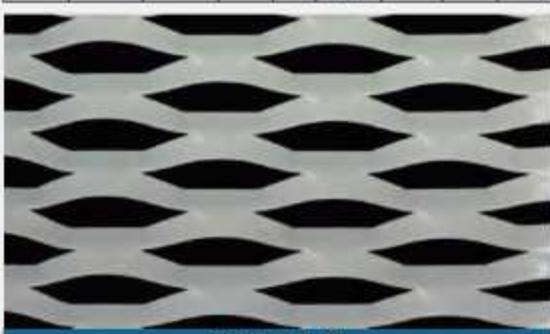


EMERALD-15

Style	SWS inner Opening	LWS inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Emerald-15	20mm	8mm	15mm	15/24 mm	95mm/122mm/152mm	1800mm/3000mm	Al/Ni/Cu/Br	30%

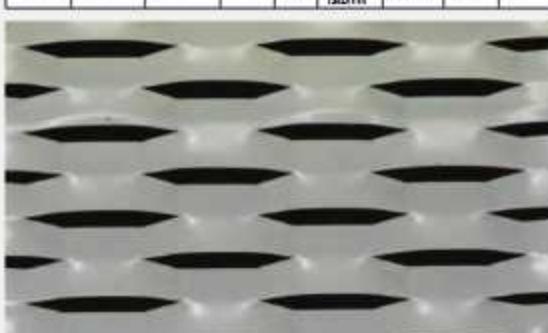


EMERALD-20

Style	SWS inner Opening	LWS inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Emerald-20	18mm	9mm	11mm	15/24 mm	95mm/122mm/152mm	1450mm/2900mm	Al/Ni/Cu/Br	15%

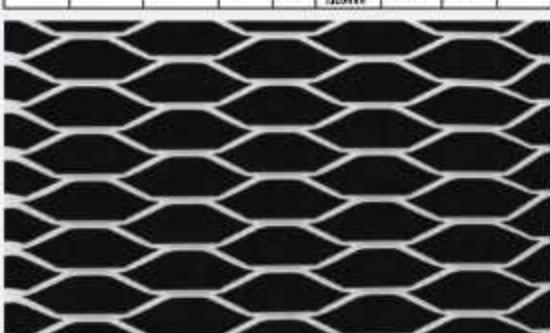

EMERALD BIRD

Style	SWS inner Opening	LWS inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Emerald-Bird	23mm	9mm	9mm	15/24 mm	95mm/122mm/152mm	3500mm/7000mm	Al/Ni/Cu/Br	30%

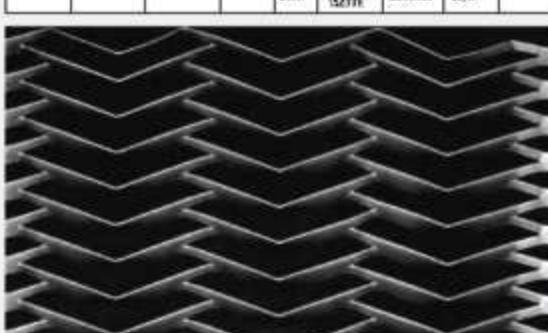

HUGO WAVE-6

Style	SWS inner Opening	LWS inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Hugo-Wave-6	21mm	12mm	6mm	15/24 mm	95mm/122mm/152mm	2500mm/5000mm	Al/Ni/Cu/Br	50%



HUGO-15

Style	SWS inner Opening	LWS inner Opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Hugo-15	6mm	175mm	15mm	15/24 mm	95mm/122mm/152mm	2500mm/5000mm	Al/Ni/Cu/Br	50%

Strand may vary by 10-20mm, Thread may vary by 10-20mm.
Length of 4.4Dmm SWM facade mesh will have tolerance in width of ±10mm & 8mm.
MADE FROM ALUMINUM/MILD STEEL, COPPER, BRASS, STAINLESS STEEL, ETC.


PRODUCT RANGE:

Dimensional Details of Façade Mesh/Sunscreen Mesh



HUGO-24

Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in Mm	Material	% Open Area
Hugo 24	40mm	105mm	24mm	15/2 / 3mm	95mm/ 122mm/ 152mm	2000mm/ 4000mm	Al/NS/ Cu/Br	40%

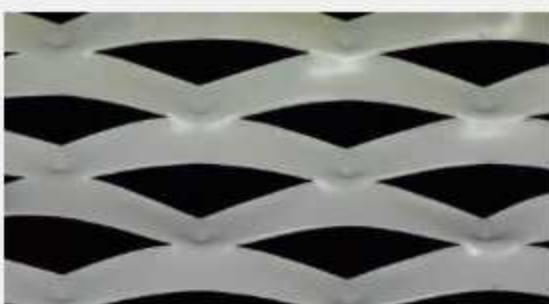


HUGO-35

Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in Mm	Material	% Open Area
Hugo 35	60mm	200mm	33mm	15/2 / 3mm	95mm/ 122mm/ 152mm	1400mm/ 2950mm	Al/NS/ Cu/Br	37%



HUGO-F-9

Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in Mm	Material	% Open Area
Hugo F-9	80mm	170mm	30mm	15/2 / 3mm	95mm/ 122mm/ 152mm	1000mm/ 2000mm	Al/NS/ Cu/Br	30%

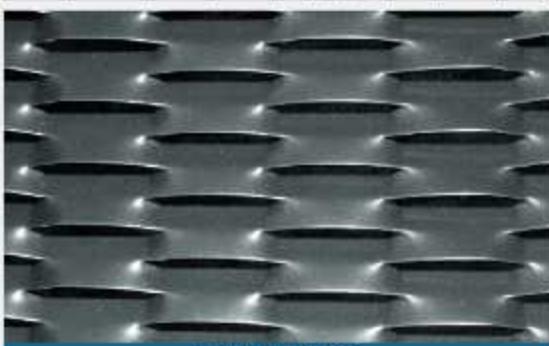

HUGO-F-24-IN15

Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in Mm	Material	% Open Area
Hugo F-24-IN15	80mm	170mm	30mm	15/2 / 3mm	95mm/ 122mm/ 152mm	1200mm/ 2500mm	Al/NS/ Cu/Br	31%



HUGO-F-17

Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in Mm	Material	% Open Area
Hugo F-17	100mm	210mm	38mm	15/2 / 3mm	95mm/ 122mm/ 152mm	1800mm/ 3800mm	Al/NS/ Cu/Br	30%



HUGO-30

Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in Mm	Material	% Open Area
Hugo 30	80mm	200mm	33mm	15/2 / 3mm	95mm/ 122mm/ 152mm	1800mm/ 3200mm	Al/NS/ Cu/Br	25%



JADE

Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in Mm	Material	% Open Area
Jade	100mm	200mm	30mm	15/2 / 3mm	95mm/ 122mm/ 152mm	1050mm/ 2100mm	Al/NS/ Cu/Br	38%




MARINE BIRD

Style	S/W Inner Opening	L/W Inner Opening	Strand Width	Thickness	Width in mm	Length in Mm	Material	% Open Area
Marine Bird	100mm	200mm	30mm	15/2 / 3mm	95mm/ 122mm/ 152mm	5100mm/ 5200mm	Al/NS/ Cu/Br	98%

MADE FROM ALUMINUM MILD STEEL, COPPER, BRASS, STAINLESS STEEL, ETC.
Length of ±40mm SWM made will vary by ±3mm, LMW may vary by ±2mm,
Strand may vary by ±0.5mm, Thicknesses may vary by ±0.2mm,
Expedited Metal Facade Mesh will have tolerance differences in width of ±10mm &
±4mm.

PRODUCT RANGE:

Dimensional Details of Façade Mesh/Sunscreen Mesh

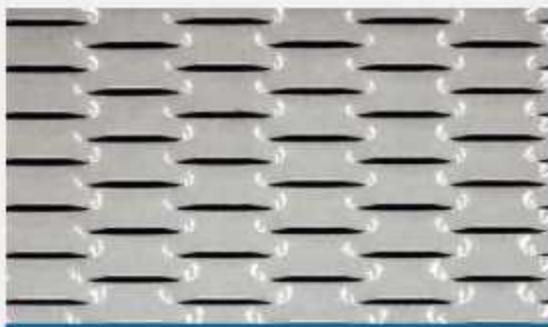


MARINE LOUVERS

Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Marine Louvers	4mm	25mm	3mm	15/2/3mm	95mm/ 120mm/ 152mm	1800mm/ 2000mm	Al/HSS/ Cu/Ni	10%




MARINE-2.5

Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Marine-2.5	8mm	30mm	2.5mm	15/2/3mm	95mm/ 120mm/ 152mm	2400mm/ 2600mm	Al/HSS/ Cu/Ni	35%

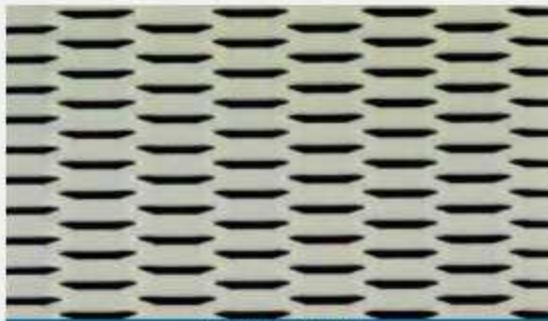


MARINE-3.5-IN4

Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Marine-3.5-IN4	4mm	35mm	3.5mm	15/2/3mm	95mm/ 120mm/ 152mm	1500mm/ 2000mm	Al/HSS/ Cu/Ni	15%

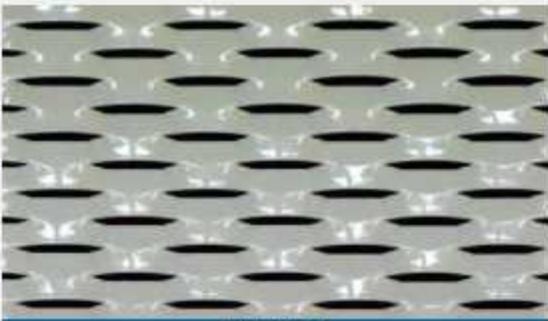


MARINE-9

Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Marine-9	7mm	30mm	4mm	15/2/3mm	95mm/ 120mm/ 152mm	1500mm/ 2000mm	Al/HSS/ Cu/Ni	20%

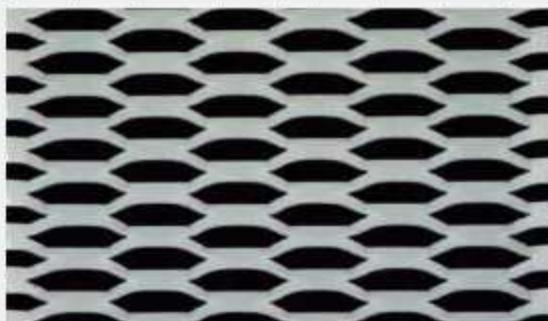


MARINE-B

Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Marine-B	8mm	30mm	4.5mm	15/2/3mm	95mm/ 120mm/ 152mm	2000mm/ 2400mm	Al/HSS/ Cu/Ni	35%

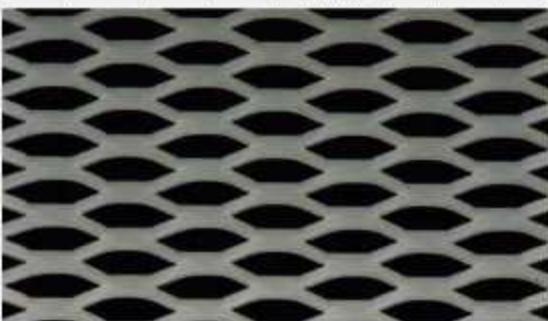


MARINE-L

Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Marine-L	8mm	25mm	4.5mm	15/2/3mm	95mm/ 120mm/ 152mm	1800mm/ 2600mm	Al/HSS/ Cu/Ni	35%

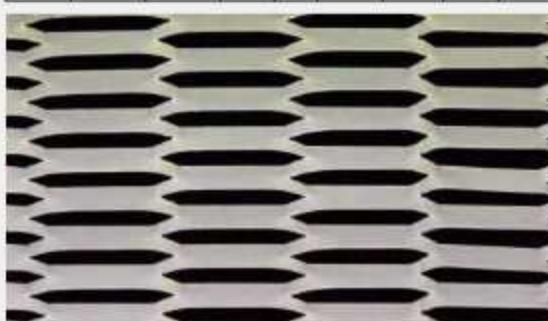

OCEAN-9

Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Ocean-9	12mm	80mm	3mm	15/2/3mm	95mm/ 120mm/ 152mm	1500mm/ 2000mm	Al/HSS/ Cu/Ni	30%

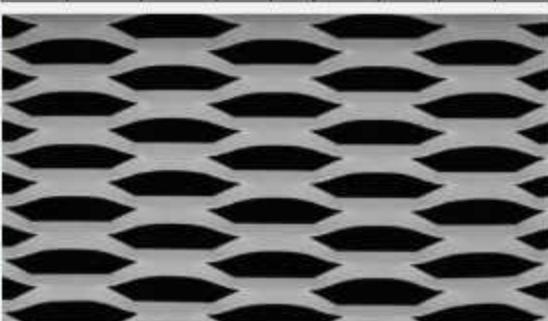

OCEAN-17

Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Ocean-17	23mm	150mm	5mm	15/2/3mm	95mm/ 120mm/ 152mm	1800mm/ 2600mm	Al/HSS/ Cu/Ni	35%

Strand may vary by 10-20mm, Threadless may vary by 20-25mm.
Length of 4.4Dmm SWM facade mesh will vary by 35mm, LWM may vary by 10mm & expandable facade mesh will have double dimensions in width of 2-10mm.
MADE FROM ALUMINUM, MILD STEEL, COPPER, BRASS, STAINLESS STEEL, ETC.


PRODUCT RANGE:

Dimensional Details of Façade Mesh/Sunscreen Mesh




OMEGA-3

Style	SMM inner opening	LWH inner opening	Strand width	Thickness	Width in mm	Length in mm	Material	% Open Area
Omega-3	9mm	15mm	3mm	15/2 / 3mm	95mm / 122mm / 152mm	2500mm / 500mm	Al/PG / Cu/Br	50%

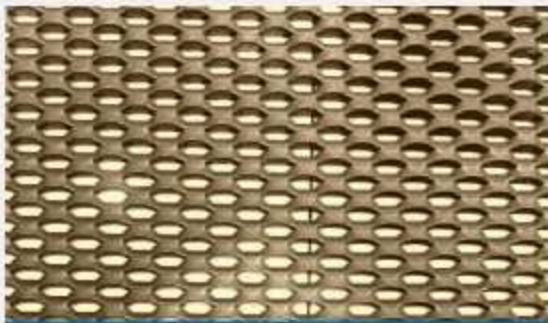

OMEGA-6

Style	SMM inner opening	LWH inner opening	Strand width	Thickness	Width in mm	Length in mm	Material	% Open Area
Omega-6	6mm	15mm	5mm	15/2 / 3mm	95mm / 122mm / 152mm	1500mm / 3000mm	Al/PG / Cu/Br	30%

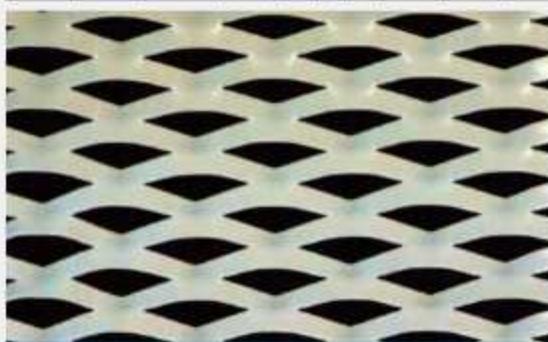


OPAL-7

Style	SMM inner opening	LWH inner opening	Strand width	Thickness	Width in mm	Length in mm	Material	% Open Area
Opal-7	20mm	40mm	7mm	15/2 / 3mm	105mm / 122mm / 152mm	2400mm / 2400mm	Al/PG / Cu/Br	30%




OPAL-10

Style	SMM inner opening	LWH inner opening	Strand width	Thickness	Width in mm	Length in mm	Material	% Open Area
Opal-10	10mm	20mm	7mm	15/2 / 3mm	95mm / 122mm / 152mm	1800mm / 3600mm	Al/PG / Cu/Br	20%

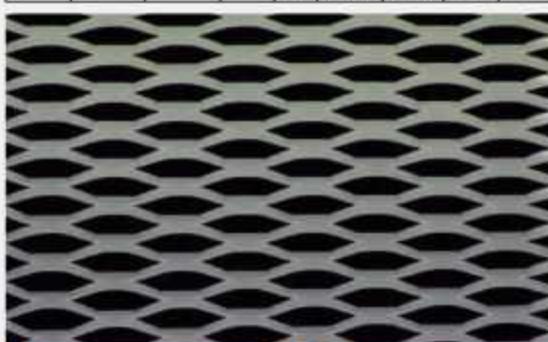


OPAL-F-6

Style	SMM inner opening	LWH inner opening	Strand width	Thickness	Width in mm	Length in mm	Material	% Open Area
Opal-F-6	12mm	45mm	8mm	15/2 / 3mm	95mm / 122mm / 152mm	1800mm / 3100mm	Al/PG / Cu/Br	35%

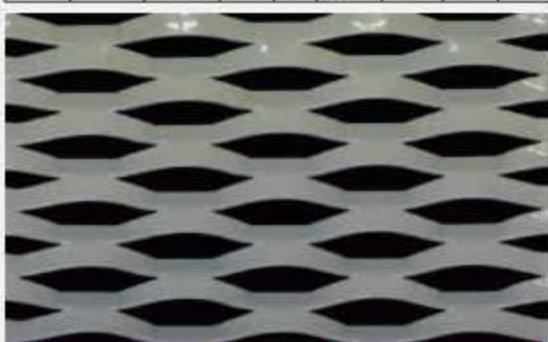

OPAL-F-9

Style	SMM inner opening	LWH inner opening	Strand width	Thickness	Width in mm	Length in mm	Material	% Open Area
Opal-F-9	12mm	45mm	8mm	15/2 / 3mm	95mm / 122mm / 152mm	1800mm / 3200mm	Al/PG / Cu/Br	30%

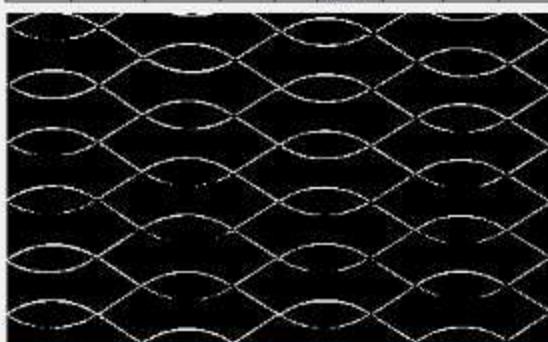

PETALS

Style	SMM inner opening	LWH inner opening	Strand width	Thickness	Width in mm	Length in mm	Material	% Open Area
Petals	25mm	95mm	4mm	15/2 / 3mm	105mm / 122mm / 152mm	4500mm / 9800mm	Al/PG / Cu/Br	15%



PRISM

Style	SMM inner opening	LWH inner opening	Strand width	Thickness	Width in mm	Length in mm	Material	% Open Area
Prism	12mm	25mm / 30mm	4mm	15/2 / 3mm	95mm / 122mm / 152mm	4500mm / 9800mm	Al/PG / Cu/Br	10%

MADE FROM ALUMINUM, MILD STEEL, COPPER, BRASS, STAINLESS STEEL, ETC.
Length of ± 40mm, SWM may vary by ± 5mm, LWM may vary by ± 2mm,
Strand may vary by ± 5mm, Thickness may vary by ± 0.2mm.
Expedited Metal Facade Mesh will have tolerance differences in Width of ± 10mm &
Length of ± 10mm, SWM may vary by ± 3mm, LWM may vary by ± 2mm.

PRODUCT RANGE:

Dimensional Details of Façade Mesh/Sunscreen Mesh

	RUBY STAG		RUBY WAVE					
Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Ruby/Stag	1mm	55mm	3mm	15/2/3mm	95mm/122mm/152mm	3600mm/4800mm	Al/HSS/Cu/Br	95%
	RUBY-6		RUBY-10					
Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Ruby-6	3mm	75mm	3mm	15/2/3mm	95mm/122mm/152mm	3600mm/4800mm	Al/HSS/Cu/Br	95%
	RUBY-15		RUBY-20					
Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Ruby-15	10mm	58mm	15mm	15/2/3mm	95mm/122mm/152mm	1500mm/3000mm	Al/HSS/Cu/Br	25%
	SQUARE-30		TOPAZ					
Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Square-30	26mm	26mm	2mm	15/2/3mm	95mm/122mm/152mm	960mm	Al/HSS/Cu/Br	90%
	TOPAZ		TOPAZ					
Style	SMM inner opening	LAM inner opening	Strand Width	Thickness	Width in mm	Length in mm	Material	% Open Area
Topaz	8mm	25mm	1mm	15/2/3mm	95mm/122mm/152mm	1650mm/2900mm	Al/HSS/Cu/Br	18%

MADE FROM ALUMINUM/MILD STEEL, COPPER, BRASS, STAINLESS STEEL, ETC.
 Length of 4.4m and SWM may vary by 3mm, LMW may vary by 2mm,
 Expanded Metal Facade Mesh will have tolerance differences in width of ±10mm &
 Strand may vary by ±0.5mm. Thicknesses may vary by 2mm.



SITE: Architect's Jaya's Office in Kerala. Mesh used: Ruby-10





ASIAN STRECK METALS

For over 60 years, we've been fortunate enough to help turn countless innovative sketches into innovative buildings. Architects, designers, investors and contractors from around the world have taken advantage of Asian Streck Metals' unmatched product development, service and support. Chances are, you've seen more of Asian Streck Metals' products on usage than you think.

We've contributed to thousands of high-profile projects, from retail, residential and commercial facilities to major transit centres and government buildings. Not only are the world's architects and designers our partners, they're our inspiration. They continue to raise the bar for excellence. We create products that help bring their visions to life: Window Coverings, Ceilings, Sun Control Systems and Façades.

Promoting environment-friendly green building technology

Asian Streck Metals' products and solutions are designed to improve indoor environmental quality and conserve energy, supporting built environments that are comfortable, healthy, productive, and sustainable.

Since 1962



Quality & Customer Satisfaction

Office & Works: 35-36, Industrial Estate, Uppalwadi,
Kamptee Road, Nagpur 440026 M.S., India
Tel.: Works - 0712-2640542
Cell: +91 98226 95359 / +91 98230 15956
E-mail: info@expandedmesh.in | sarafsiddharth@gmail.com
<https://www.expandedmesh.in> | <https://www.sarafbros.com>

Manufactured on German machines

From the finest mesh of interior to the robust facade of outdoors, STRECHMET has emerged as a go to product for Architects, Industries & Interior Designers.